


ADDENDUM NO. 3
TO THE
CONTRACT DOCUMENTS
FOR
VADER-ENCHANTED VALLEY RESERVOIR
FOR
LEWIS COUNTY PUBLIC WORKS
VADER, WASHINGTON

THIS ADDENDUM IS HEREBY MADE A PART OF THE CONTRACT DOCUMENTS TO THE SAME EXTENT AS THOUGH IT WERE ORIGINALLY INCLUDED THEREIN.

BIDDERS MUST ACKNOWLEDGE RECEIPT OF ALL ADDENDA ON THE BID PROPOSAL FORM. BID PROPOSALS THAT FAIL TO ACKNOWLEDGE ALL ADDENDA MAY BE CONSIDERED IRREGULAR AND MAY BE REJECTED.

ISSUED THIS 20TH DAY OF APRIL 2018.

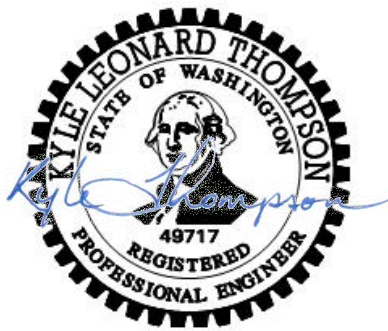

Apr 20, 2018 | 1:18 PM PDT

MURRAYSMITH
400 East Mill Plain Boulevard, Suite 203
Vancouver, WA 98686
(360) 448-4230

ITEM NO. 1 – DRAWINGS SHEET E-2, SINGLE LINE DIAGRAM

REPLACE Note 3 with the following:

“3. THE OWNER’S SYSTEMS INTEGRATOR SHALL FURNISH, INSTALL AND CONFIGURE A NEW NETWORK ETHERNET SWITCH AND REPLACE THE PROCESSOR MODULE IN THE EXISTING FILTER CONTROL PANEL WITH NEW ROCKWELL AUTOMATION SLC-5/05 CONTROLLER CATALOG # 1747-L552. THE OWNER’S SYSTEMS INTEGRATOR WILL PROVIDE PROGRAMMING SERVICES FOR INTEGRATING THE PROJECT CHANGES INTO THE EXISTING SCADA SYSTEM. THE CONTRACTOR SHALL COORDINATE WORK BETWEEN THE WATER PUMP STATION PLC PROGRAMMER AND THE OWNER’S SYSTEM’S INTEGRATOR TO PROVIDE A COMPLETE AND WORKING SYSTEM.”

ITEM NO. 2 – DRAWINGS SHEET E-3, RESERVOIR SITE ELECTRICAL PLAN

ADD the following note after note 3:

“4. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL FIELD INSTRUMENTS SHOWN ON THE DRAWINGS. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER’S SYSTEM’S INTEGRATOR TO PROVIDE A COMPLETE AND WORKING SYSTEM.”

END OF ADDENDUM NO. 3